

SUREFIT™ WIRE GAUZE VISOR 20CM UNBOUND

PRODUCT CODE: ANX100-130-000

OFFERS GENERAL ROBUSTNESS AGAINST PARTICLES AT 12MS

TECHNICAL SPECIFICATION

HEAD PROTECTION

ACCESSORIES

INSTRUCTIONS FOR USE

In use ensure that the faceshield fits comfortably and securely on the head

Ensure that a suitable visor has been fitted with the protective film removed from it

Ensure the visor is in place before entering the hazard area

DIMENSIONS OF VISOR

Weight: 133g (Approx.)


Thickness: 1.0 mm

Length: 200mm

DIMENSIONS OF OUTER PACKAGING

Quantity: 140

Weight: 22.6kg (Approx.)

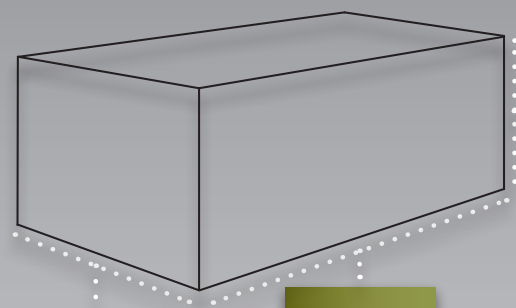

WIDTH:
380mm


LENGTH:
490mm

HEIGHT:
510mm

CONFORMITY

Meets the requirements of EN 166 & EN 1731 S

EC Type Examination Certificate Number 85724, issued by BSi Product Certification

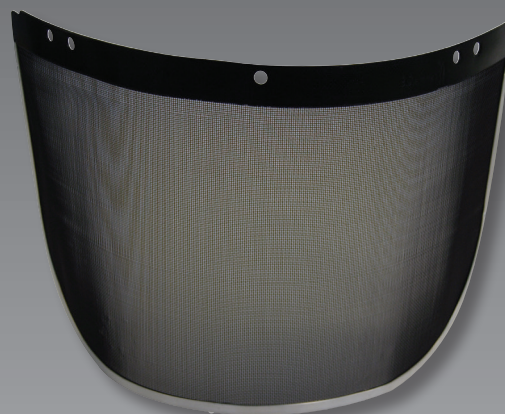

VISOR:
Painted Steel Mesh

LIMITATIONS OF USE

Protection will only be offered if the visor carrier and a visor are fitted correctly to a suitable Industrial Safety Helmet with the helmet attachment kit

If the visor becomes scratched or damaged it should be replaced, likewise if the visor is subjected to severe impact it should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The visor, when in contact with the skin may cause allergic reactions to susceptible individuals

If this occurs leave the hazard area, remove the eyeshield and seek medical advice

The visor is not suitable for use with chemicals – if you are unsure contact your supplier or JSP for help and advice

CLEANING & MAINTENANCE

The visor may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The visor should be stored out of direct sunlight, away from chemicals and extremes of temperature

VISOR PERFORMANCE

20cm Wire gauze Visor

Offers protection against particles at 12 ms

Markings: EN1731 S