



## SALA Detachable Aluminium “Scaffold hook” connector for use with fall arrest equipment.

### Description

Sala connectors ensure there are no weak links in the worlds premier safety systems.

This detachable “scaffold hook” can be attached to spliced or webbing lanyards, and other PPE products. Detachable, with internal gate means it can be added to a range of products and stays there until it is decided to be removed.

The automatic gate closing and locking makes it an ideal choice when the user will opened and closed the connector many timed during work period.

### Main features

- Light weight Aluminium alloy
- Large opening 60mm ideal for scaffold tubes
- Automatic closing and locking, Double action security
- Quick and easy to open with one hand
- Easily used by left and right handed persons
- Detachable, with internal gate
- Marked with Batch reference for easier quality assurance traceability.

### Applications

Specially adapted to easily make connections to anchorage points up to 60mm in diameter.

Ideally suited for work in the following areas:-

- Scaffolding/steel work
- Mast tower work
- Structural steel
- Ladder climbing



### Associated Products

Can be used in association with:-

**KE5175R** Splices rope lanyard

**KE5125W, KE5175W** Webbing lanyard

**KE5125X, KE5175X** Expander lanyard

#### **KD1TALONHN**

Talon webbing retractable fall arrest device 3m.

#### **KD100/2**

Lightweight webbing retractable fall arrest device 2.5m.



**Capital Safety Group** [www.capitalsafety.com](http://www.capitalsafety.com)

France Tel +33 (0)4 97 10 00 10 Email [information@capitalsafety.com](mailto:information@capitalsafety.com)

UK Tel +44 (0)1928 571 324 Email [info@csgne.co.uk](mailto:info@csgne.co.uk)



**KJ50645**


(R-50645)



## SALA Detachable Aluminium Scaffold hook connector for use with fall arrest equipment.

### Technical specification

- Body and Gate material - aluminium alloy (Zicral)
- locking mechanism - aluminium alloy (Dural)
- Surface finish – polished
- Gate opening – 60mm
- Internal gate opening – 20mm
- Height – 238mm
- Width – 113mm
- Net Weight - 245g
- CE marked – Yes
- Conforms to standard – EN362
- Breaking Strength – 23kN
- Marking - Quality control batch reference
- Marked - breaking Strength

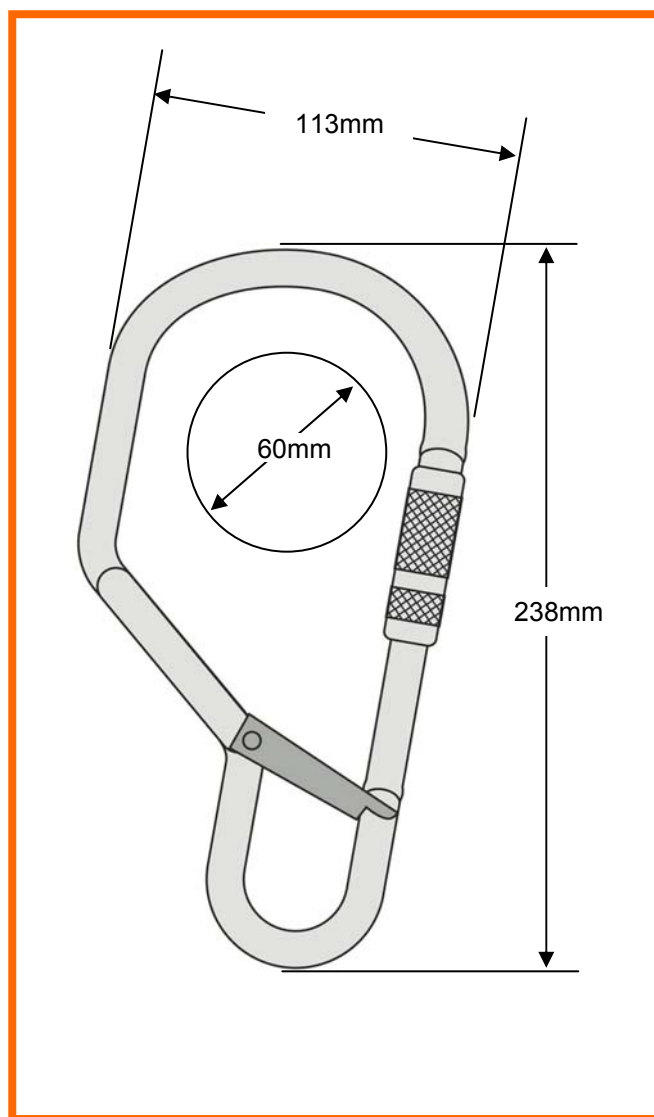

### Options

#### KJ527

Lightweight Fixed aluminium scaffold hook with 60mm opening.

#### KJ5108

Detachable steel scaffold hook with 50mm opening. High Breaking strength 30kN