

EVOLite[®]

MIDPEAK - WHEEL RATCHET - NON-VENTILATED

PRODUCT CODE: AJA170-00 _ _ 00

THE LIGHTEST SAFETY HELMET AVAILABLE IN EUROPE

TECHNICAL
SPECIFICATION

HEAD PROTECTION

INSTRUCTIONS FOR USE

Fit helmet on head and fasten strap to ensure fit

For adequate protection this helmet must be worn with peak facing forward


Ensure the helmet is adjusted to the size of the user's head

WEBBING HARNESS:
HDPE Strap & Webbing Clips
with Polyester Webbing Straps




CHAMLON™ SWEATBAND:

Egyptian cotton core with
porous PU coating for maximum
sweat absorption. PH neutral,
dermatologically tested



SHELL:

High strength engineering
grade ABS which has been UV
Stabilised

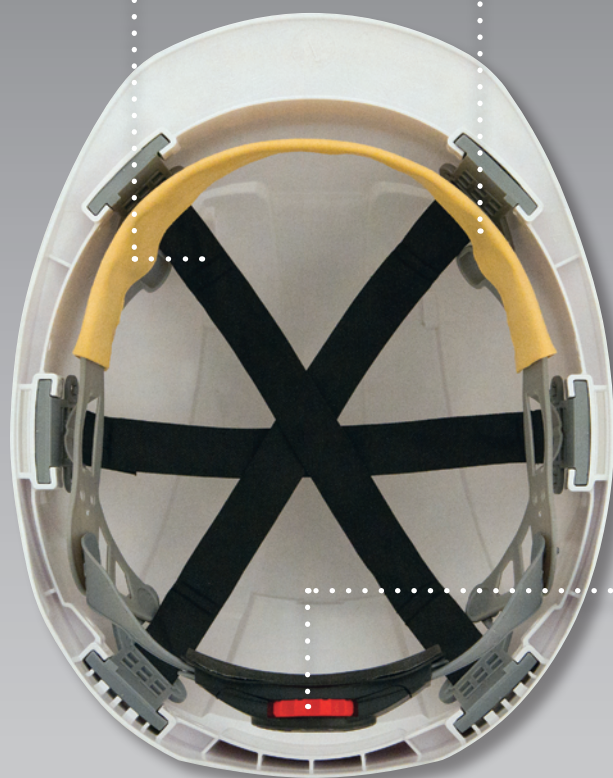

WHEEL RATCHET:

The Revolution® Wheel Ratchet
is the new easy to use wheel
ratchet adjustment system to
create a firm comfort fit with
added security



CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried
with a soft cloth

The helmet should not be cleaned with chemical or abrasive
cleaners

The helmet should be stored out of direct sunlight

The helmet should be stored away from chemicals and extremes
of temperature

CONFORMITY

EN 397 & GOCT P 50460-92 for Industrial Safety Helmets

EN 50365 for Helmets for use in low voltage installations

EC Certificate Number 0279, issued by BSi Product Certification

Meets optional Lateral Deformation performance

Meets optional Molten Metal Splash performance

Meets optional Electrical Insulation requirements

Wide size range. Slip or wheel ratchet - High comfort fit

Available vented or unvented. Available with mid or micro peak

Company personalisation available by printing



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK



UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 15/08/13, V4

EVOLite®

MIDPEAK - WHEEL RATCHET - NON-VENTILATED

PRODUCT CODE: AJA170-00 _ _ 00

THE LIGHTEST SAFETY HELMET AVAILABLE IN EUROPE

TECHNICAL SPECIFICATION

HEAD PROTECTION

DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 3.2kg (Approx.)

HEIGHT:
450mm



WIDTH:
240mm

LENGTH:
580mm

HELMET FEATURES

EN STANDARD	EN397 EN50365	Yes Yes
PERFORMANCE	Impact Resistance Lateral Deformation Electrical Insulation	Yes 50 Joules Yes Yes: EN397 440V EN50365 1000V
TEMPERATURE RESISTANCE	Molten Metal (MM) +50°C Low Temperature	Yes Yes Yes: EN397 -30°C FOCT P 50460-92 -30°C
SHELL MATERIAL	ABS Recyclable UV Stabilised	Yes Yes Yes
HARNESS MATERIAL	HDPE Textile	Yes Yes
OPTIONS	Universal Accessories Reflective CR2 option Integral Eyewear	Yes Yes Yes
HARNESS SYSTEM OPTIONS	JSP 3D Wheel Ratchet 6 pts	Yes Yes Yes
CHINSTRAP OPTIONS	4 pts 2 pts	Yes Yes
LOGO OPTIONS	Front Rear Side MOQ Logo Individual Name	Yes Yes Yes 10 Yes

DIMENSIONS OF HELMET

Size: 530 - 640mm

Weight: 299g (Approx.)



HELMET COLOURS

Insert the following two digit number in place of the dashes in the product code of your desired helmet



01 White

LIMITATIONS OF USE

Protection will only be offered if the helmet is fitted correctly

Any helmet subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK



UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 15/08/13, V4