

Helixon




II 2 G Ex h IIC T6 Gb



①




②



③



④

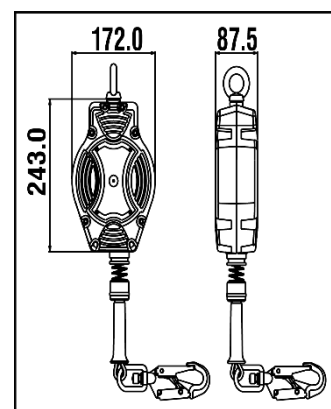**HS CODE**

84798997

CARTON SIZE / PCS.

60 x 40 x 24 cm / 4

FA 20 402 10B : AET N°2777/10832-02/E01-01

FA 20 402 10S: AET N°2777/10832-02/E05-01

Satra Technology Europe Ltd., N° 2777,
 Bracetown Business Park, Clonee,
 Dublin, D15YN2P, Ireland

MODULE D FI14/14003.02

SGS Fimko Oy, N°0598
 Takomotie 8,
 00380 HELSINKI, Finland

ACKNOWLEDGEMENT OF RECEIPT N°3975/1/2018 (ATEX)

Technická Inšpekcia, a.s. N°1354
 Trnavská cesta 56, 821 01 Bratislava, Slovenská Republika

REF.	FA 20 402 10B	FA 20 402 10S
LG. 	10 m 140 KG	
CE	EN 360:2002	
MAT. 	Polyamide 6 - 30% fiber glass	
	 STEEL Ø4.5 mm FA 50 101 17 / FA 50 203 20 with fall indicator	 INOX Ø4.5 mm FA 50 101 17 / stainless steel connector with fall indicator
	x2	
R(kN)	12 kN	
	NO	
+	 II 2 Exh IIC T6 Gb EN 360 §4.6 (endurance test) EN 80079-36:2016 EN 80079-37:2016	
	4.50 KG	4.50 KG

LG.

Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers

MAT.

Matière carter / câble
Material of casing / wire rope
Material cárter / cable
Material dei carter / cavo
Material Gehäuse / Seil


Matière connecteur haut / connecteur bas
Material of top connector / bottom connector
Material conector alto / conector bajo
Materiale connettore alto / connettore basso
Material oberes / unteres Verbindungselement


Nombre d'émerillons
Number of swivels
Cantidad de eslabones giratorios
Numero di tornichetti
Anzahl der Wirbel


Homologué pour le travail à proximité d'arêtes vives
Approved for work near sharp edges
Homologado para trabajo cerca de aristas vivas
Omologato per lavoro in prossimità di spigoli vivi
Zugelassen für Arbeiten in der Nähe scharfer Kanten