

ELECTRICAL RESISTANCE 20cm POLYCARBONATE VISOR

PRODUCT CODE: ANK310-230-000

OFFERS PROTECTION AGAINST MEDIUM ENERGY HIGH-SPEED PARTICLES AT 120 M/S (270MPH), LIQUID DROPLETS, MOLTEN METAL & SHORT CIRCUIT ELECTRIC ARC WHEN FITTED TO AN APPROPRIATE VISOR CARRIER

TECHNICAL SPECIFICATION

HEAD PROTECTION

ACCESSORIES

INSTRUCTIONS FOR USE

In use ensure that the visor and visor carrier fits comfortably and securely on the helmet and is secured on the head

Ensure that a suitable visor carrier has been fitted with the protective film removed from the visor

Ensure the visor is in place before entering the hazard area

VISOR PERFORMANCE

Offers protection against medium energy high-speed particles at 120 m/s (270mph), liquid droplets, molten metal & Short Circuit Electric Arc

The optical qualities of the visor comply with the requirements of optical class 1 (highest)

DIMENSIONS OF VISOR

Length: 298mm

Width: 131mm

Height: 200mm

Visor Thickness: 1.5mm

Weight: 164g (Approx.)

DIMENSIONS OF OUTER PACKAGING

Quantity: 50

Weight: 9.12kg (Approx.)



COMPATIBILITY

Fits onto Surefit visor carriers and can be used in conjunction with the below safety helmets



LIMITATIONS OF USE

Protection will only be offered if a visor carrier and the visor are fitted correctly to a suitable Industrial Safety Helmet with the helmet attachment kit

If the visor or visor carrier becomes scratched or damaged they should be replaced

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The Industrial Safety Helmet harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the visor and Helmet and seek medical advice


Not suitable for use with all chemicals - if you are unsure contact your supplier or JSP for help and advice

CONFORMITY

Meets the requirements of EN 166 including optional short circuit electric arc (8). Conforms to EN166:1.3.8.9.B

To be placed on EC Certificate Number 85724, issued by BSi Product Certification

Markings: EN166:1.3.8.9.B

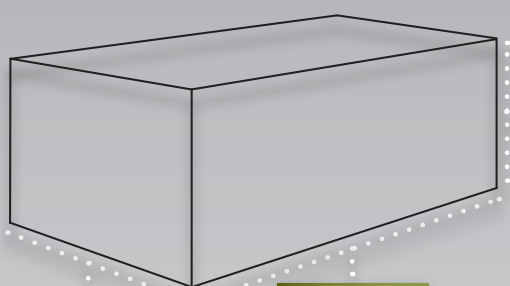

HEIGHT:
290mm

WIDTH:
359mm

LENGTH:
422mm

CLEANING & MAINTENANCE

The Visor may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

Store out of direct sunlight away from chemicals and extremes of temperature

