


| DOC NO                   | ISSUE | REVISION | PRODUCT REF. | DATE                  | QUALITY PLAN |
|--------------------------|-------|----------|--------------|-----------------------|--------------|
| QF/RD/05                 | 01    | 00       | FAR0210      | 20.10.14              |              |
| TECHNICAL SPECIFICATIONS |       |          |              | SIGNATURE             |              |
|                          |       |          |              | PRESIDENT (TECHNICAL) |              |

## ENERGY ABSORBING WEBBING LANYARD (FAR0210)

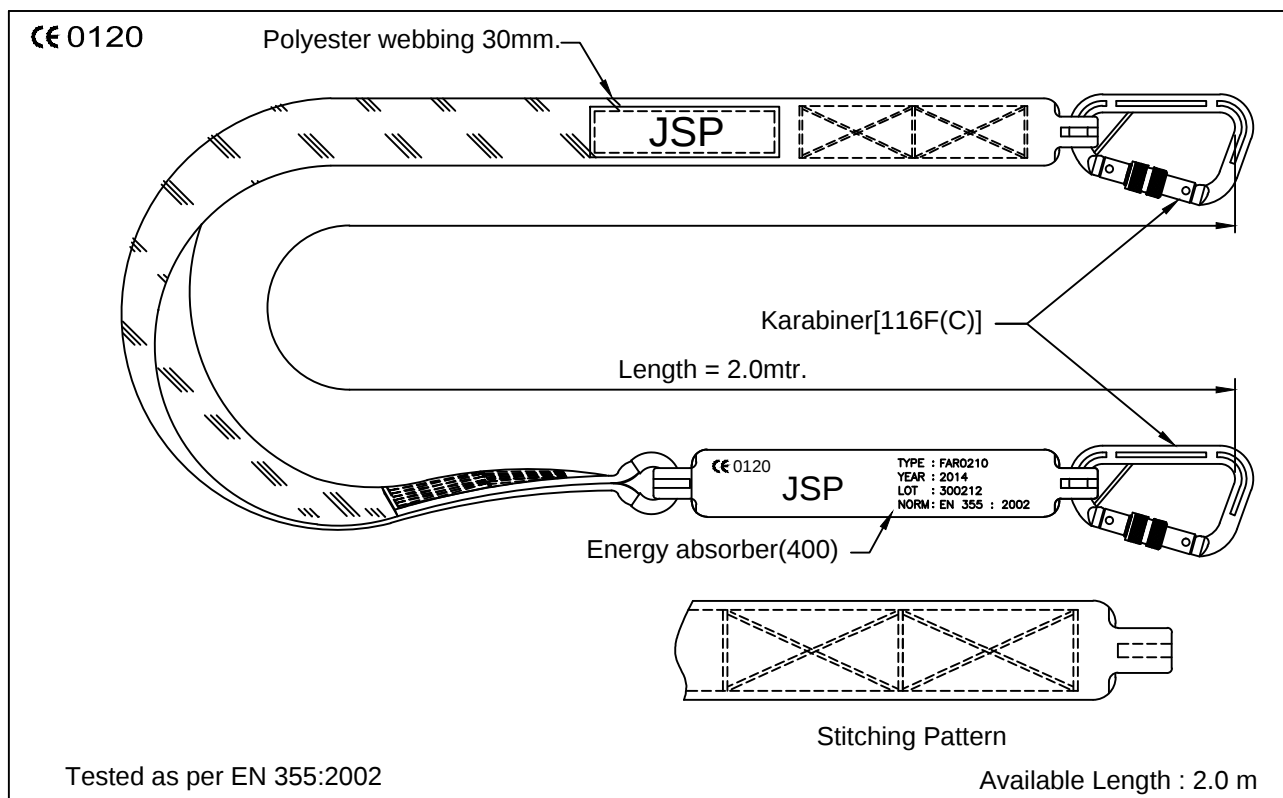

### DESIGN

- Webbing lanyard incorporated with Energy absorber (400).
- One side of the lanyard equipped with karabiner [116F(C)] while other side of the lanyard equipped with Karabiner [116F(C)] also.

### WEBBING

- Material : Polyester.
- Width : 30±1 mm.
- Breaking strength : 25 kN (Min).

### STITCHING THREAD

- Material : High-tenacity polyester.

### VITAL TEST COMPLIANCE

- Static Strength : 15 kN for 3 Minutes.
- Dynamic Performance : Maximum breaking force does not exceed 6 kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kg.

### WEIGHT

- 2.0 meter : 390 gm ±10 gm.

