


DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RD/05	01	00	FAR0404	20.10.14	
TECHNICAL SPECIFICATIONS				SIGNATURE	
				PRESIDENT (TECHNICAL)	

INTERNAL SHOCK ABSORBING EXPANDABLE WEBBING LANYARD (FAR0404)

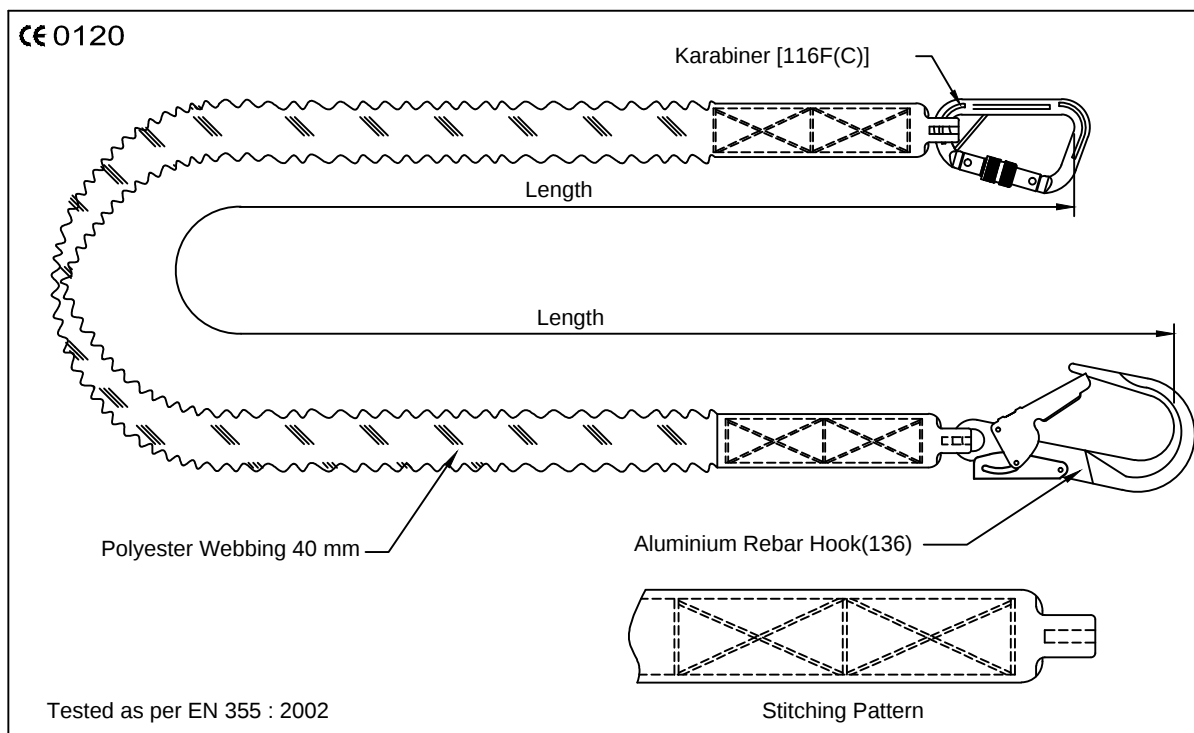

DESIGN

- 40 mm wide Tubular polyester webbing with textile loops.
- One side equipped with Karabiner [116F(C)] with captive pin and and other side Aluminium Rebar Hook (136).

WEBBING

- Material : Polyester.
- Width : 40±1mm.
- Breaking strength : 25 kN.

STITCHING THREAD

- Material : High-tenacity polyester.
- Colour : White.

METAL COMPONENTS

- Material : Aluminium Alloy.
- Plating : Natural.
- Finish : Black powder coated.
- Breaking Strength : 22.2 kN.

VITAL TEST COMPLIANCE

- Static Strength : 15 kN for 3 Minutes.
- Dynamic strength : Maximum breaking force does not exceed 6 kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kgs.

WEIGHT

- 2.0 Meter (Expanded) : 989.0 gm ±10 gm.

LENGTH

- Expanded : 2.0 mtr.
- Contracted : 1.40 to 1.60 mtr.

