


BLACKSTICK+

HIGH CUT PROTECTION

- Glass, metal and wood industry (splinters)
- Iron-tipping, sheet metal handling
- Handling of heavy and abrasive loads
- Continuous lifeline work
- Rescue: extrication glove

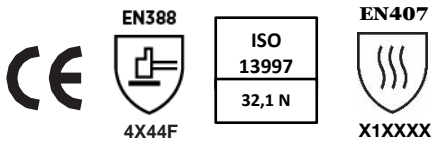

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

AET N° 0072/011/162/02/19/0058 (IFTH LYON)

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-secureite

SIZES



COMPOSITION

Glove HPPE/mineral fibres/polyamide weave
 Palm Polyurethane coating
 Palm reinforcement Cow split leather

CARE




PACKAGING

Bag of 10 pairs - Box of 100 pairs


Maximum cut protection
 Technological weave


Longevity : excellent abrasion resistance
 Reinforcement on wear zone


Heat resistance
 Thermal insulation:
 100 °C for 40 seconds and up to 14 seconds at 250°C


Excellent perforation resistance
 Cow split leather reinforcement


 Hanging loop

