

PRODUCT NUMBER: 2232087

ARACUT® LIGHT

For light handling operations with risks of cuts in a dry atmosphere. Can be used as a liner. Automotive industry, car equipment manufacturers, paper etc.

Overview	<div><div>Reference Number</div><div>2232087</div></div> <div><div>Product Type</div><div>Gloves</div></div> <div><div>Range</div><div>Cut and Puncture Protection</div></div> <div><div>Line</div><div>Cut resistant</div></div> <div><div>Brand</div><div>Honeywell</div></div> <div><div>Brand formerly known as</div><div>SPERIAN</div></div> <div><div>Industry</div><div><div><div>Industry</div><div>Automotive and Part Manufacturer</div><div>Building and Construction</div><div>Glass Industries</div></div><div><div>Iron and steel industry</div><div>Metal steel</div><div>Paper Industries</div></div></div></div> <div><div>Product Use</div></div>
----------	---

For light handling operations with risks of cuts in a dry atmosphere. Can be used as a liner.
Automotive industry, car equipment manufacturers, paper etc.

Features & Benefits

Feature

100 % Kevlar® knitted glove
Without stitch
Ambidextrous

Benefit

COMFORT

The knitting technique helps to make the glove conform snugly to the hand, with good dexterity.
It offers maximum comfort and added sturdiness.
The tight gauge (13) gives the glove added support to maintain dexterity and feel.
It is ambidextrous and thus more cost-effective.

RESISTANCE

Thee Kevlar® fibre offers excellent cutting resistance and protection against thermal hazards in a dry atmosphere.

Technical Description

Description

CE CATEGORY : II Intermediary risks
In accordance with standards :
EN 420-2003 EEC Basic standards
EN 388-2003 Mechanical hazards

CHARACTERISTICS :

100 % Kevlar® knitted glove
Without stitch
Ambidextrous

Product Technology

Knitted

Fiber

Kevlar®

Gauge

13

Glove/liner color

Yellow

Length

25 cm

Harmlessness

In conformity with the European standards

Dexterity

Class 5

Sizes

6 to 10

EN 407 - Heat and/or Fire

Behaviour and/or fire	X
Resistance to contact heat	X
Resistance to convective heat	X
Resistance to radiant heat	X
Resistance to small metal splashes	X
Resistance to molten metal splashes	X

EN 388 - Mechanical Hazards Abrasion Resistance


Abrasion resistance	0
Cutting resistance	2
Tear resistance	4
Puncture resistance	X

Packaging Label

Tagging

CE SPERIAN
2232087 XX
EN 420
EN 388 : 024X

Certifications

 **E.C. Declaration of Conformity**

EC Category PPE

2


Quality Assurance

ISO 9001 / 2000

EC Certificate Number

0075/797/162/05/08/0163

EC Attestation

 EC Attestation

EC Attestation Number

0075/797/162/05/08/0163

Photos & Images

We're sorry, there are no images available at this time.

Additional Information

User Manual
UI 102

User Information Sheet
102

Maintenance

Storage Information
Minimum packaging 10 pairs.
Cartons of 100 pairs.

Stokage in shelters of the light.

Care Instructions
This article can be cleaned. For cleaning instructions, please contact Bacou-Dalloz.



[View other region sites](#)
© 2011 Honeywell International Inc.



In application of the Directive ref. 89/686/EEC of the 21st of December 1989, concerning the alignment of member state legislation relating to personal protective equipment and the decrees n° 92-765, 766 and 768 of 29th of July 1992 concerning the transposition of this Directive into French law,

CTC

4, rue Hermann Frenkel - 69367 Cedex 07 - France

Tel +33 (0)4 72 76 10 10 - Fax +33 (0)4 72 72 76 10 00 - E-Mail : ctclyon@ctcgroupe.com - www.ctc.fr

Comité Professionnel de Développement Cuir Chaussure Maroquinerie - Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

authorized by decree of the Ministry of Work, Employment and Health of the 20th of December 2010,

registered under the number 0075, published in OJEC, delivers :

CE TYPE EXAMINATION CERTIFICATE 0075/797/162/05/08/0163

To the following model of personal protective equipment :

* protective glove against mechanical risks.

* reference of the model : 2232087

* responsible for placing on the market :

HONEYWELL SAFETY PRODUCTS EUROPE

Immeuble Edison ZI-Paris Nord II 33, Rue des Vanesses 95 958 ROISSY CDG CEDEX
France

Description of the protective glove, reference of technical rules verified in the context of the CE type examination and informations indicated on the product are detailed in the following pages of this certificate.

Drawn up in Lyon, on May 26th, 2008

Update 01 of July 30th, 2012

Issued by Nadine PIPAZ



NOTA : Any modification to new items of the personal protective equipment object of this CE type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the CE type approval certificate (change of adress, change of company status) should be brought to the attention of the notified body in accordance with law n° R. 4313-38 of the French Code of Work.

1. DESCRIPTION OF THE PROTECTIVE GLOVE

According to the technical file index : 02

Reference : 2232087

Basic Model

Dated : JULY, 2012

5 fingers 100% kevlar knitted glove. Ambidextrous. Overedge color: T7/blue - T08/Yellow - T09/Red - T10/Green

Available sizes :

07 08 09 10

Visual description :



Material :

	Colour	Material	Gauges	Thikness
PALM	Natural	100% Kevlar	13	
BACK	Natural	100% Kevlar	13	
LINING				
CUFF	Natural	100% Kevlar	13	
	Natural	Elastic Rubber 175	13	
BINDING	Blue/ Yellow/ Red/ Green	Polyester		

2. PROTECTION SCOPE

Compliance with the essential requirements of the Directive 89/686/EEC has been verified by using following technical rules:

- * EN 420:2003+A1:2009 - General requirements for gloves and test methods
- * EN 388:2003 - Protective glove against mechanical risks
- * Innocuousness - At the date of certificate, the product is in compliance with Annex XVII of European REACH regulation (552/2009/EC and associated revisions).

References of test reports performed in order to verify the compliance with the requirements of the technical rules :

Laboratory	CTC Asia	CTC France	Other
EN 420		1206-8862/1	1206-8862/1
Azo		1112-16848/1	
EN 388		1206-8862/1	

Performance levels offered against mechanical risks (EN 388:2003) are:

Abrasion resistance	Blade cut resistance	Tear strength resistance	Puncture resistance
0	2	4	X

« X » means that the test hasn't been performed ; no protection is required


The levels of performance have been measured on the palm

3. MARKING

Each glove is clearly marked with the following information:

- * Logo of the authorized representative:
- * **CE** marking
- * reference of the model: 2232087
- * size
- * pictogram for mechanical risks followed by the performance levels
- * information pictogram

Marking example:

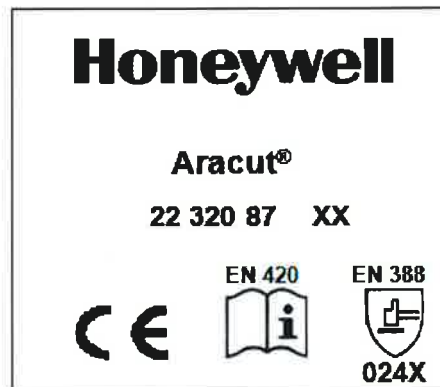



E.C. Declaration of Conformity

The manufacturer or its legal representative supplier in the European Community:
Honeywell Safety Europe

Declares that the Personal Protective Equipment described here after conforms to the provisions of the European Council Directive 89/686/CEE:

Designation: ARACUT® LIGHT

Reference: 2232087

Standard(s): EN 388, EN 407, EN 420

This PPE is the object of the below EC examination certificate n°:
0075/797/162/05/08/0163

Delivered by:

CENTRE TECHNIQUE DU CUIR
4 rue Hermann Frenkel
69367
Lyon Cedex 07

Drawn up in Lyon, on the 29/03/2013

By: Nadine Pipaz

Division: Gloves

HONEYWELL SAFETY PRODUCTS EUROPE
Immeuble Edison - ZI Paris Nord II - 33 rue des Vanesses
BP 50288 Villepinte - 95958 ROISSY CDG CEDEX
SAS au capital 17 750 000 € - Siret 348 882 307 00137
Tel. +331 4990 7979 - Fax +331 4990 7980

ZI Paris Nord II 33, rue des Vanesses BP 50288 95958 Roissy CDG France
Tel: +33 (0) 49 90 79 79 Fax: +33 (0)1 49 90 79 80
www.honeywellsafety.com