



PCTxxxS & PCTxxxSJ

→ Shotgun Stick

STANDARD

- CEI 60832-1
- CEI 60855-1

USE

The Shotgun stick is used to hold, position, remove, screw, unscrew and operate with any tool or network equipment having a gripping ring. It can also be used to guide something of small section.

ADVANTAGES

This insulating operating stick is light weight, portable and very robust. Can be used in a wide temperature range (-25 to 55 ° C) and indoors and outdoors. The length of the shaft defined by the control sleeve ensures a good grip of the stick.

CHARACTERISTICS

Composition: Insulating tubes on foam Ø32 mm and insulating rod Ø10 mm in accordance with IEC60855-1 standard, Colors available orange RAL2002 or yellow near RAL1018

The head is made of insulating composite material and including the retractable hook. Composite handle of hook control

The hook and its control system are made of stainless materials (or treated against corrosion).

Supply with a sheathed suspension hook

Rubber cap at its lower end





Open hook



Cardan hook



Swallowed hook

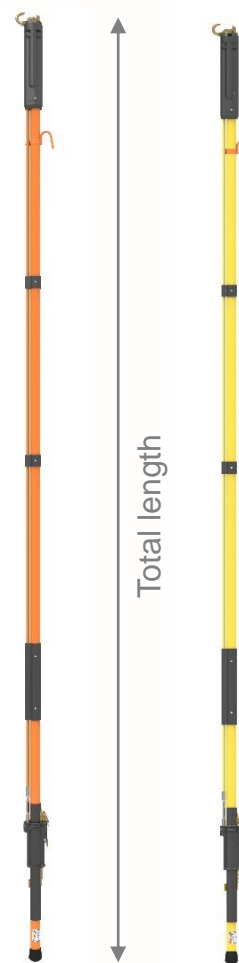

PCTxxxS (RAL2004) PCTxxxSJ (RAL1014)

References	Total lenght (m)	Weight (kg)	Nb of Rod Guide
PCT120S ou PCT120SJ	1,25	2,3	1
PCT140S ou PCT140SJ	1,40	2,4	
PCT180S ou PCT180SJ	1,85	2,6	
PCT200S ou PCT200SJ	2,00	2,8	2
PCT240S ou PCT240SJ	2,45	3,1	
PCT260S ou PCT260SJ	2,65	3,2	
PCT320S ou PCT320SJ	3,25	3,7	3
PCT380S ou PCT380SJ	3,85	4,2	4

OPTIONS

Carrying bag

Document not contractually binding, errors and omissions excepted