


PROSOD/1

G3A LINE

HEAT PROTECTION

- Welding operations
- Plating operations in the automotive sector
- Stamping
- Slitting operations

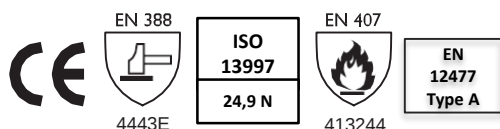

Products in stock still have EN388 labelling according to directive 89/686/EEC : 4X43E

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

AET N°0075/011/162/10/18/2328 (CTC LYON)

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-securite

SIZES



COMPOSITION

Palm Oil-proofed and water-proofed cow split leather

Back Cow split leather

Lining Para-aramid/cotton/mineral fibres/polyester knitted glove

Cuff Heat treated leather

Total length 40 cm

CARE



PACKAGING

Bag of 5 pairs - Box of 25 pairs

PRO•ONE:
Our selection

PRO•ONE:
Available singly

PRO•CLEAN:
Cleaning option



High resistance to molten metal spray



Heat resistance
Heat treated leather



Heat resistance
Thermal insulation:
100°C for 15 seconds
minimum and 250°C for
10 seconds

Oil-proofed and
water-proofed leather



Excellent cut resistance
Para-aramid/cotton/mineral
fibres/polyester lining



Forearm protection
Cuff length
15 cm

